


多层镀膜·有效抑制雜光和鬼像
 對應兩百萬像素相機
 高分辨率、高對比度成像
 聚焦和光圈調節螺絲鎖定
 緊湊的結構設計
 低畸變成像

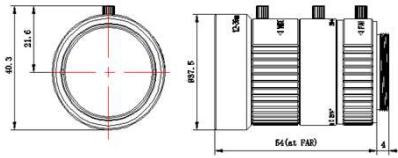

2MP C-Mount 2/3" M-Iris

產品型號: M281236MP

No.	項目	規格		
1	最大传感器尺寸	2/3"(11mm)		
2	焦距	12-36mm		
3	接口	C-Mount		
4	F/#	F2.8-C		
5	工作距离	W : 0.15m-∞ T : 0.45m-∞		
6	视场角 (对角×水平×垂直)	2/3"	W : 50.8°×41.3°×31.2° T : 17.0°×13.8°×10.4°	
		1/2"	W : 37.6°×30.3°×22.8° T : 12.6°×10.1°×7.6°	
		1/3"	W : 28.5°×22.8°×17.2° T : 9.5°×7.6°×5.7°	
7	对象大小 (在最近对焦距离处)	2/3"	W : 167.8×132.0×97.5mm T : 168.3×135.3×101.8mm	
		1/2"	W : 119.3×94.4×70.1mm T : 123.2×98.7×74.2mm	
		1/3"	W : 88.3×70.1×52.3mm T : 92.6×74.2×55.7mm	
8	后焦距 (in air)	W : 14.36mm T : 12.62mm		
9	操作方式	对焦	手动	
		变焦	手动	
		光圈	手动	
10	畸变率	2/3"	W : -3.43%@y=5.5mm T : 2.30%@y=5.5mm	
		1/2"	W : -2.33%@y=4.0mm T : 1.14%@y=4.0mm	
		1/3"	W : -1.42%@y=3.0mm T : 0.62%@y=3.0mm	
11	滤镜尺寸	M35.5×0.5mm		
12	镜头尺寸 (宽×长)	37.5×54mm		
13	重量	105g		
14	工作温度	-10°C ~ +50°C		
15	入瞳距离	W:25.35mm T:67.70mm		
16	入瞳直径	W:4.30mm T:12.67mm		
17	出瞳距离	W:-84.90mm T:-121.24mm		
18	出瞳直径	W:30.38mm T:42.72mm		
19	光学总长	W:65.92mm T:70.28mm		
20	放大倍率	W:-0.0684 T:-0.0682		
对焦距离		放大倍率	前景深(mm)	后景深(mm)
W				
150mm	-0.06840	4.8000	5.1282	
200mm	-0.05324	8.4433	9.2220	
250mm	-0.04359	13.0550	14.5770	
300mm	-0.03690	18.6050	21.2390	
350mm	-0.03199	25.0640	29.2540	
T				
450mm	-0.06820	5.0087	5.1227	
500mm	-0.06221	6.1760	6.3324	
550mm	-0.05720	7.4637	7.6719	
600mm	-0.05294	8.8715	9.1418	
650mm	-0.04917	10.3990	10.7430	
W		W		
CRA		MTF		
T		T		
CRA		MTF		