




A
B
C
D

A
B
C
D

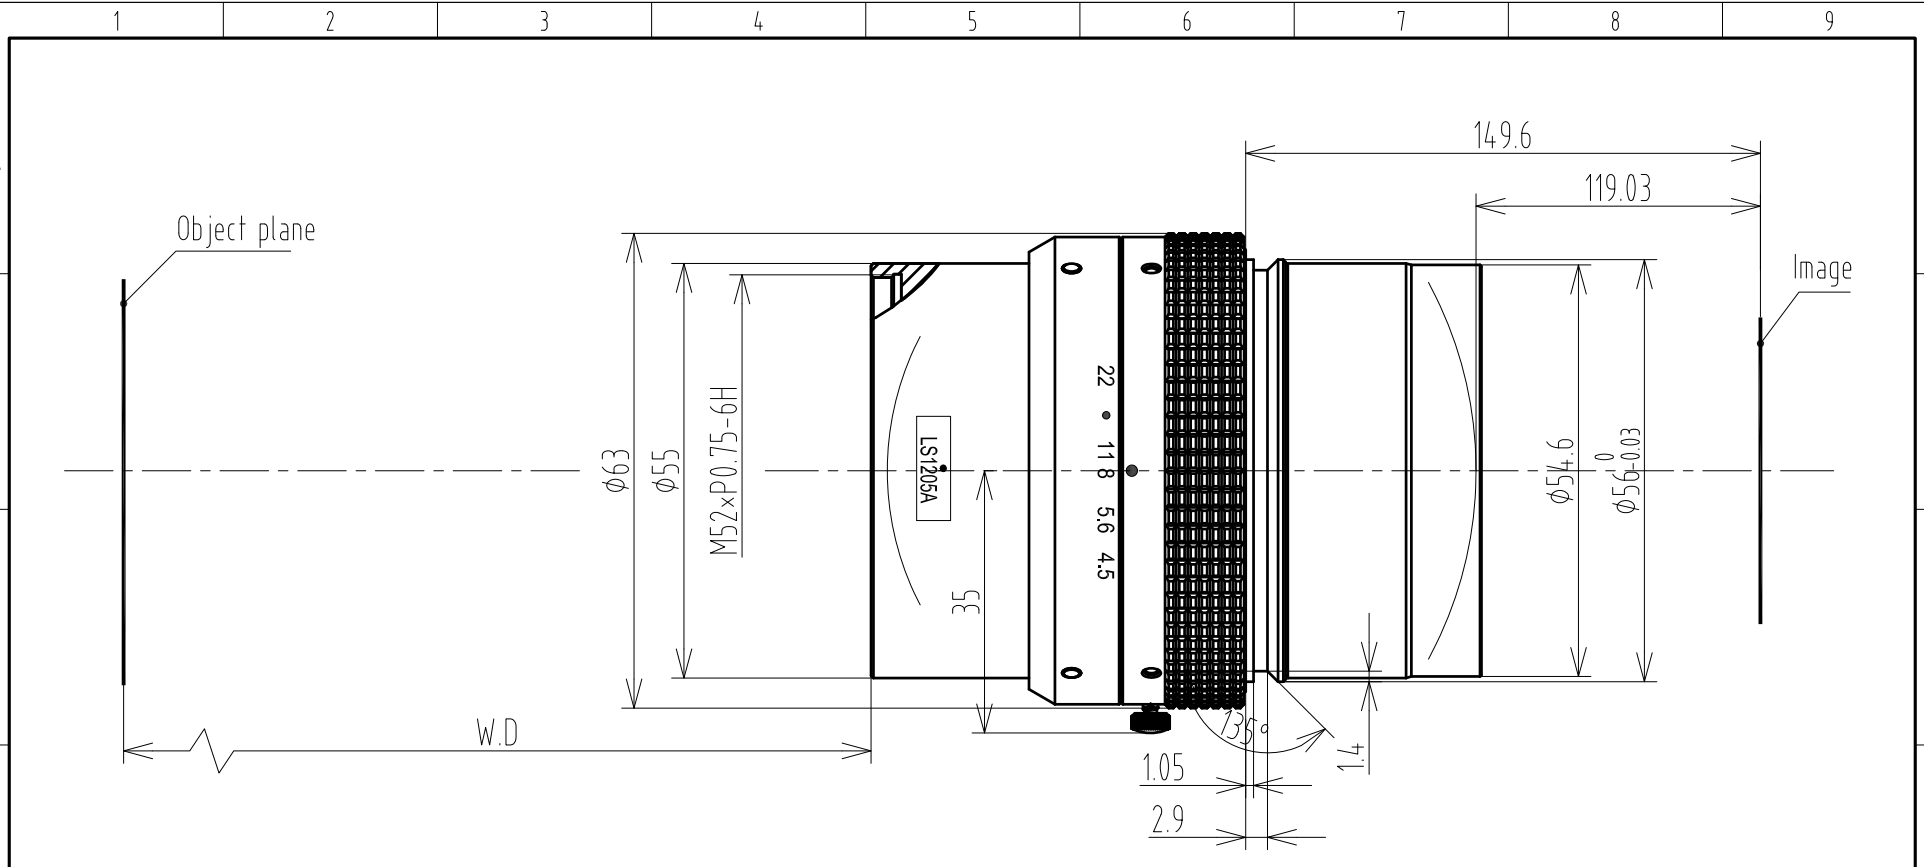


Main Specification

Magnification	0.45X	0.5X	0.6X		
Working Distance	318.2±5	291.7±5	251.9±5	Image space NA	0.073
Image Distance	113.17±2.5	119.03±2.5	131.05±2.5	Object space NA	0.036
Conjugate Distance	511.61±9	491±9	463.19±9	Entrance pupil diameter	24.1
Flange Focal Distance	143.8	149.6	161.6	Entrance pupil position	37.88
Max image		φ62		Exit pupil diameter	30.93
F/#		4.5		Exit pupil position	-212.57
EFL		116			
FOV		29°			
ENP Diameter		24.1			
Distortion		<0.01%			

注：
Logo上的圆点粘贴位置与成像面垂直为最佳成像点。

TOLERANCE :
LINEARITY TOLERANCES ±0.05
ANGULAR TOLERANCES ARE ±30°
DRAFT ANGLES AREA ±0.5°/SIDE



材料(环保) 单位 比例
mm 1:1

IMAGE QUALITY		
AXIS	φ46.2	φ66

设计	朱周德	2017-03-30	名称	LS1205A技术规格图	页码
校对					1/1
审核			代号	LS1205A-SPEC	版本
批准					V0
标记	处数	更改文件号	担当	变更日期	

1 2 3 4 5 6 7 8 9 A4